

SPECIFICATIONS

KEYBOARD

Battery size	280mAh
Battery life	Up to 100 hours
Charge time	2 hours
Wireless range	Up to 8m
Dimensions	438.5mm x 129.1mm x 7.8mm
Operating system	WIN XP / WIN7 / WIN8 / WIN10 / Linux / Mac OS

MOUSE

Battery size	280mAh
Battery life	Up to 100 hours
Charge time	2 hours
Wireless range	Up to 8m
Dimensions	107mm x 57.9mm x 23.3mm
Operating system	WIN XP / WIN7 / WIN8 / WIN10 / Linux / Mac OS

TROUBLESHOOTING & SUPPORT

RE-PAIRING YOUR DEVICE

If you get a connection failure, please do the following.

MOUSE

- Turn off the mouse and remove the 2.4Ghz wireless USB dongle from your computer
- Press and hold the scroll wheel and right click button on the mouse simultaneously for three seconds (do not let go)
- Switch the mouse back on whilst holding down the buttons, the LED will begin to flash red
- Plug the dongle into a spare USB port on your PC, they may take up to 30 seconds to pair.

KEYBOARD

- Turn the keyboard off and leave the USB dongle plugged into your computer.
- Move the keyboard near the dongle.
- Press and hold either "Esc + Q" or "Esc + K" and turn the keyboard on.
- The power indicator will flash while pairing, then turn off once paired.

In the event you need to contact Veho for support or troubleshooting for your WZ-1 Wireless Keyboard & Mouse visit our website at veho-world.com and use our pop-up chat box.



EC DECLARATION OF CONFORMITY

Hereby, Veho UK LTD declares that the radio equipment type (VHK-001-WZ1) is in compliance with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available at

<https://veho-world.com/compliance/>

Frequency band(s) - 2405-2470MHz, 2.4G ISM band

Maximum radio-frequency power - 8dB

HUTO[∞]


WIRELESS KEYBOARD & MOUSE

VHK-001-WZ1

veho[®]

1. CHARGING


We recommend fully charging both keyboard and mouse before using. Ensure you use the charging cable supplied and a compatible power source. Charge time is up to 2 hours per device.

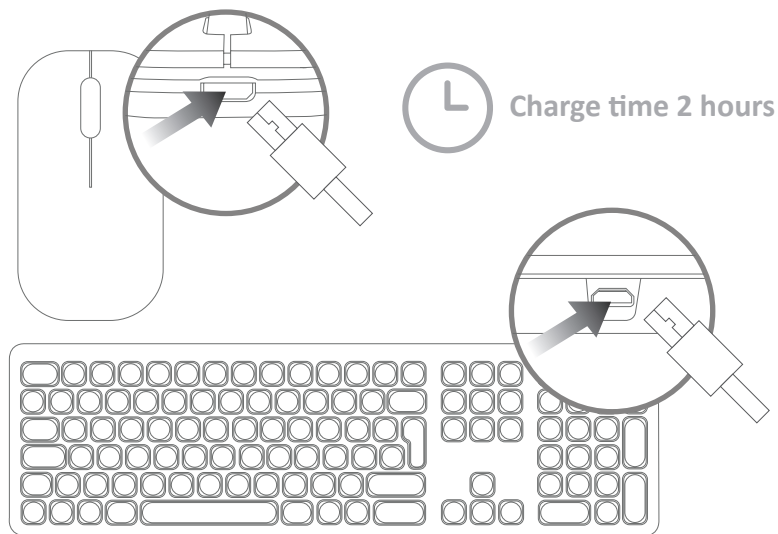

2. PAIRING

Remove the 2.4Ghz wireless USB dongle (**there is only one USB dongle located in either the bottom of the keyboard or the mouse**) and plug it into an available USB port on your PC.

Turn on the mouse and keyboard using the power switch, pairing will be automatic but depending on your device it can take up to 2 mins.

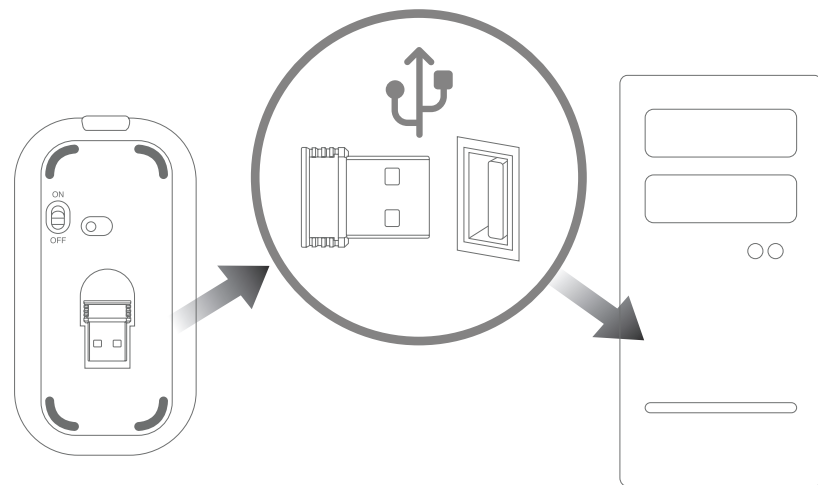

LED INDICATORS

